



DIVA-IS0505PW

Industrial Unmanaged PoE+ 기가비트 이더넷 스위치

모델: DIVA-IS0505PW

RJ45 기가비트 이더넷 5포트
 802.3at PoE+ 전원 출력(4포트)
 12~48VDC 이중 입력
 -40 ~ +75°C 동작 온도

사양서

적용 기술

Standard	IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3x Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3af Power over Ethernet IEEE 802.3at PoE+
Processing Type	Store and Forward

스위칭 성능

Switch Fabric	10Gbps/non-blocking
MAC Table Size	8K
Packet Buffer	1Mbits
Packet Length	10Kbytes
Packet Forwarding Rate	14'88Mpps
Jumbo Frame	up to 9kBytes

인터페이스

RJ45 Port	5x 10/100/1000T(x) with 4x PoE+ auto negotiation speed duplex mode, auto MDI/MDI-X
PoE Pin Out	V+, V+, V-, V-, for pin 4, 5, 7, 8
LED Indicators	Per unit: PWR, PSD Ports: Link, PoE

전원 사양

Operation Voltage	12-48VDC, redundant dual inputs >50VDC for PoE+ output recommended
Connection	1x removable 4-contact terminal block
Power Consumption	스위치 기능 사용 시 최대 6W 4포트 PoE 출력 시 최대 125W
PoE Power Budget	120W @ 48VDC, 90W @ 24VDC, 60W @ 12VDC Max. 25.5 W per PoE port

동작 환경

Operating Temperature	-40°C ~ 80°C (-40°F ~ 176°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)


인증

EMI	KC, FCC Part 15 Subpart B Class A, CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (PFMF)
MTBF	>200,000 hours
Warranty	2 Years

기구적 특징

Enclosure	Aluminum
Protection Class	IP40
Dimensions	29x95x67 mm (WxHxD)
Weight	0.37 kg
Mounting	DIN-Rail Mounting, Wall Bracket



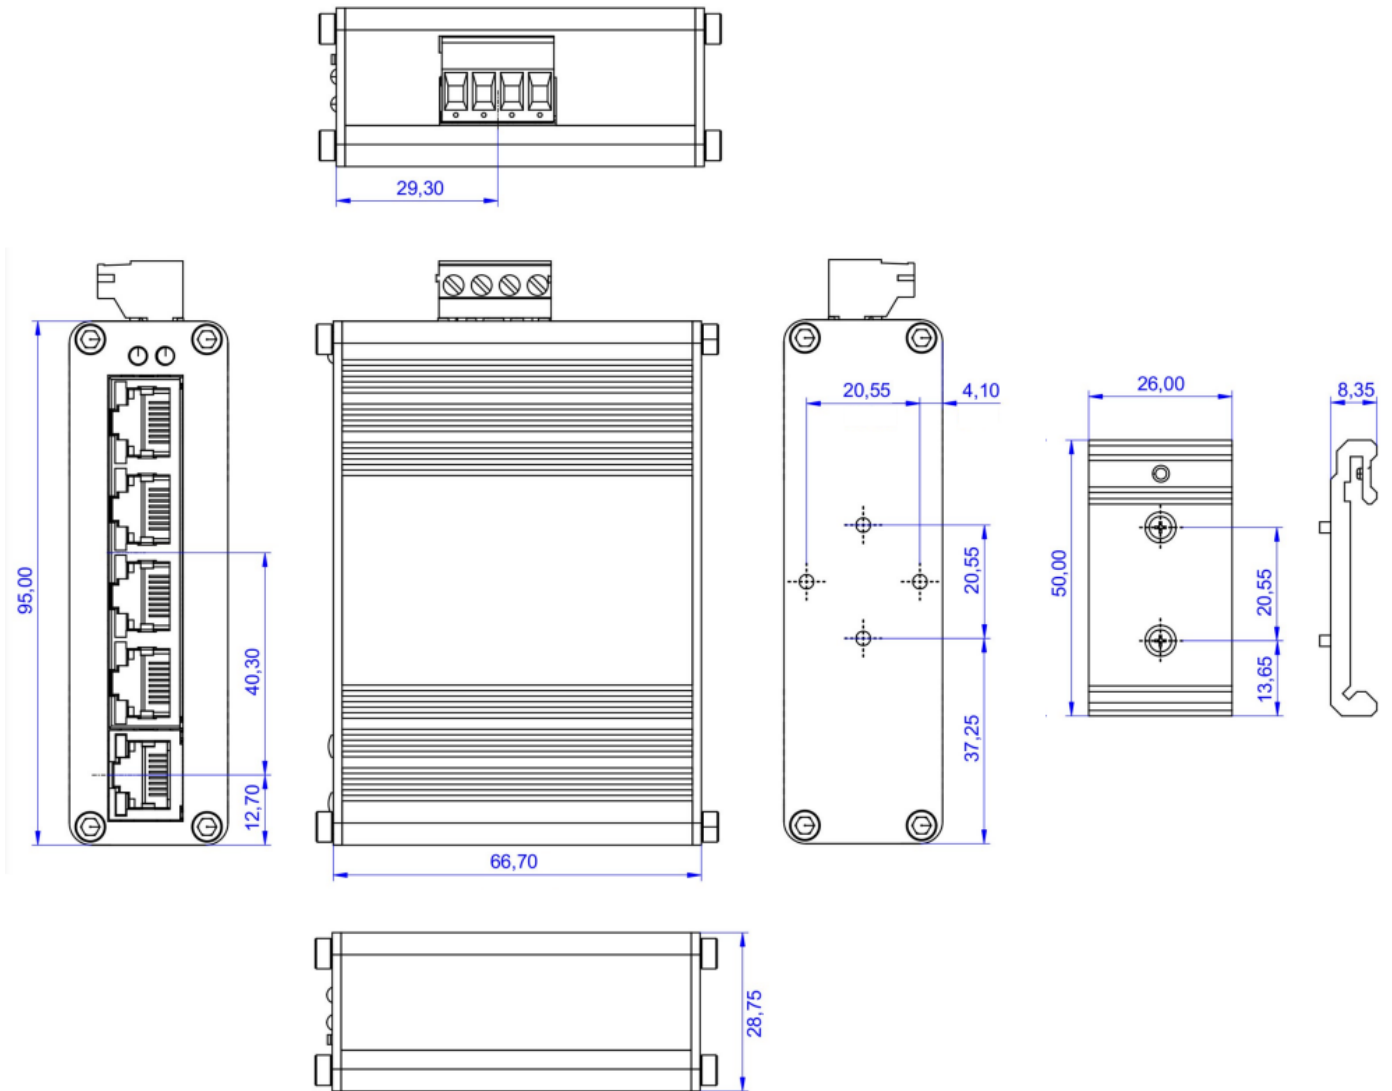

견적/기술 문의

☎하이링크

support@highlink.co.kr