



DIVA-IS0505K

Industrial Unmanaged 기가비트 이더넷 스위치

모델: DIVA-IS0505K

RJ45 기가비트 이더넷 5포트

12~48VDC 이중 입력

IP30 케이스

35mm 단레일, 벽면 장착

-40 ~ +75°C 동작 온도

사양서

적용 기술

Standard	IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3x Flow Control
Processing Type	Store and Forward

스위칭 성능

Switch Fabric	10Gbps
MAC Table Size	2K
Packet Buffer	1Mbits

인터페이스

RJ45 Port	5x 10/100/1000T(x) auto negotiation speed duplex mode, auto MDI/MDI-X
LED Indicators	Per unit: PWR1, PWR2 Ports: Link/Act, Speed

전원 사양

Operation Voltage	12-48VDC, redundant dual inputs
Connection	1x removable 4-contact terminal block
Power Consumption	5W
Protection	Overload Current Protected Reverse Polarity Protected

동작 환경


Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)

기구적 특징

Enclosure	Steel Met
Protection Class	IP30
Dimensions	29x140x98 mm (WxHxD)
Weight	0.55 kg
Mounting	DIN-Rail Mounting, Wall(option)

인증

EMI	KC, FCC Part 15 Subpart B Class A, CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT) IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
MTBF	>100,000 hours
Warranty	2 Years

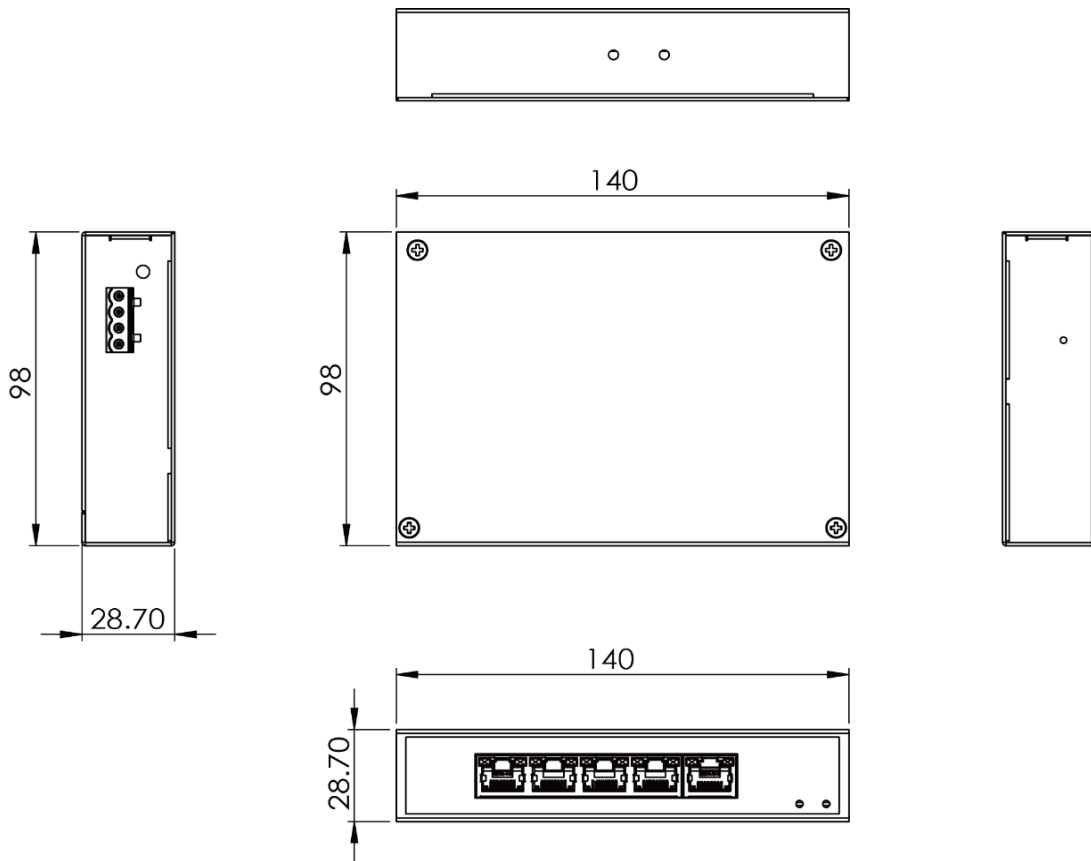

견적/기술 문의

㈜하이링크

support@highlink.co.kr